

Engine			
Series	Isuzu 4JJ1-TC Hi-Power		
Description	3.0 litre turbo diesel, in-line 4-cylinder, DOHC, 16-valve		
Maximum torque	380 Nm @ 1800→2800 rpm (automatic & manual)		
Maximum power	130 kW @ 3600 rpm		
Bore x stroke	95.4mm x 104.9mm		
Displacement	2999cc		
Compression ratio	17.3 : 1		
Cylinder head	Isuzu-patent special aluminium alloy with double-walled water jacketing		
Valve gear	Chain-driven dual overhead camshafts, roller rockers, 4 valves/cylinder		
Induction	Electronic high pressure common rail direct fuel injection with Variable Swirl System (VSS) and intercooled Variable Geometry System (VGS) turbocharger		
Cylinder block	Cast iron upper with induction-hardened cylinder bores, cast alloy lower; pistons with nickel composite oil rings		
Emission level	Euro 4		
Alternator	90 amp		
Transmissions			
Manual	Isuzu MUX 5-speed manual with high torque capacity and output reduction 275mm diameter clutch plate		
Automatic	Aisin AW TB50-LS 5-speed with sequential shift and brake shift lock electronically controlled, tri-mode with Adaptive Grade Logic Control and fuel-saving lock-up torque converter on gears 3, 4 & 5 ▶ Adaptive Grade Logic Control: holds gear in varied-gradient ascents, selects gear on steep descents to hold speed with engine braking ▶ Hill-ascent and hill-descent control		
Ratios: 1		5-speed Manual	5-speed Automatic
	1st	4.332	3.520
	2nd	2.561	2.042
	3rd	1.492	1.400
	4th	1.000	1.000
	5th	0.791	0.716
	Reverse	3.947	3.224
Final drive	4x2 SX	3.416	3.727
	LS	3.727	3.727
	4x4	3.727	3.727
	Snorkelled diff breathers to reduce mud blockage		
Transfer gearing	4x4 low-range	2.482	2.482
	4x4 high-range	1.000	1.000
4x4 system	"Terrain Command" control with 'shift on the fly' 2-high↔4-high selection at up to 100km/h		
Drivetrain system	Traction Control System (TCS) & Electronic Stability Control (ESC) on all model variants		

Chassis	
Frame	Separate, full-length heavy-duty truck chassis with 7 cross members on low ride models & 6 cross members on high ride models
Front suspension	4x2 SX Low-Ride model: Independent, coil springs, gas shock absorbers, upper and lower wishbones, stabiliser bar 4x2 High-Ride & 4x4 models: Independent, high-ride, coil springs, gas shock absorbers, upper and lower wishbones, stabiliser bar
Rear suspension	4x2 SX Low-Ride model: Alloy-steel underslung semi-elliptic leaf springs, heavy-duty on cab chassis; gas shock absorbers 4x2 SX High-Ride & 4x4 models: Alloy-steel overslung long-span semi-elliptic leaf springs, heavy-duty on cab chassis and LS-M; gas shock absorbers
Axles	
Front	Independent 4x4: fully floating with outer CV, inner double offset joints and equal length driveshafts. Ratings: Low-Ride 1250kg; High-Ride 1350kg
Rear	Rigid semi-floating banjo with hypoid final drive and dual tapered needle roller bearings. Rating: 1870kg
Steering	
Engine-speed-sensitive variable capacity power-assisted rack and pinion system; 3.2 turns lock-to-lock via tilt-adjustable steering wheel	
Brakes	
Power-assisted via 10.5" servo unit; 300mm diameter ventilated front discs with 2-piston callipers, 295mm rear drums (280mm on Low-Ride models)	
Anti-lock Brake System (ABS) with Electronic Brakeforce Distribution (EBD) and Emergency Brake Assist (EBA)	
Central pull up park brake	
Wheels & Tyres	
4x2 SX (Low-Ride)	15" x 6.5" drilled silver-finish steel; 215 / 70 R15c Highway Terrain
4x2 SX (High-Ride)	16" x 7" drilled silver-finish steel; 245 / 70 R16 All Terrain
4x2 LS-U (High-Ride)	17" x 7" alloy; 255 / 65 R17 Highway Terrain
4x4 EX, SX	16" x 7" drilled silver-finish steel; 245 / 70 R16 All Terrain
4x4 LS-M	16" x 7" alloy; 245 / 70 R16 All Terrain
4x4 LS-U	17" x 7" alloy; 255 / 65 R17 Highway Terrain
Warranty & Roadside Assistance	
New vehicle warranty and premium roadside assistance for 5 years/130,000km, whichever occurs first, for eligible customers; excludes accessories and trays.	

Please read with current vehicle brochure. Isuzu UTE Australia reserves the right to change specifications and features at any time.

Published January 2014.

Colours depicted herein may differ from actual due to the printing process. Please refer to isuzuute.com.au or consult your authorised Isuzu UTE Dealer for current availability of models, options, specifications, colours and Isuzu UTE Genuine Accessories.



FEATURES AND SPECIFICATIONS

FEATURES												
	SX	SX	SX	LS-U	EX	SX	SX	LS-U	SX	SX	LS-M	LS-U
Engine												
2999cc DOHC 4cyl. with intercooled turbo charger, Euro 4 (380Nm, 130kW)	●	●	●	●	●	●	●	●	●	●	●	●
Transmissions												
5-speed manual transmission	●	●		●	●	●	●	●	●	●	●	●
5-speed "Rev-Tronic" automatic transmission with sequential sport mode			●	●		●	●	●	●	●	●	●
Safety & Security												
4-channel 4-sensor ABS (Anti-lock Brake System) with EBD (Electronic Brakeforce Distribution)	●	●	●	●	●	●	●	●	●	●	●	●
Electronic Stability Control (ESC)	●	●	●	●	●	●	●	●	●	●	●	●
Traction Control System (TCS)	●	●	●	●	●	●	●	●	●	●	●	●
Emergency Brake Assist (EBA)	●	●	●	●	●	●	●	●	●	●	●	●
6 Airbags: dual front, curtain and side airbags	●	●	●	●	●	●	●	●	●	●	●	●
Height-adjustable upper mounts for front seat belts	●	●	●	●	●	●	●	●	●	●	●	●
Pre-tensioners with load limiters for front seat belts (*Dual Pretensioners)	●	●	●	●	●	●	●	●	●*	●*	●*	●*
3-point retractable seat belts for all rear and centre seating positions (*centre seat not applicable)			●	●				●*	●*	●	●	●
Childseat tethers x 3 (rear - outer and centre)		●	●	●				●	●	●	●	●
Height-adjustable head restraints for all full-size seats	●	●	●	●	●	●	●	●	●	●	●	●
Child-proof rear door locks		●	●	●				●	●	●	●	●
Single 10.5 inch servo brake master cylinder	●	●	●	●	●	●	●	●	●	●	●	●
Side anti-intrusion bars inside all doors	●	●	●	●	●	●	●	●	●	●	●	●
Engine immobilizer	●	●	●	●	●	●	●	●	●	●	●	●
Warning alarm: headlights or parking lights on with ignition key removed	●	●	●	●	●	●	●	●	●	●	●	●
Rear window demister		●	●	●				●	●	●	●	●
High Density Polyethylene (HDPE) fuel tank	●	●	●	●	●	●	●	●	●	●	●	●
High mount brake light on cabin	●	●	●	●	●	●	●	●	●	●	●	●
Dual horn	●	●	●	●	●	●	●	●	●	●	●	●
Protection												
Under-front steel plate skid/splash shield (high-ride)			●	●	●	●	●	●	●	●	●	●
Under-front aero cover (low-ride)	●	●										
Steel plate guards: sump, transfer case, fuel tank leading edge; sheet steel under fuel tank					●	●	●	●	●	●	●	●
Suspension and Brakes												
Standard rear leaf suspension		●	●	●				●	●	●	●	●
Heavy duty rear leaf suspension	●				●	●	●	●	●	●	●	●
Front independent, coil spring suspension w/gas shock absorbers, upper and lower wishbones & stabiliser bar	●	●	●	●	●	●	●	●	●	●	●	●
Heavy-duty brakes: 300mm ventilated front discs w/twin-pot calipers, 295mm rear drums			●	●	●	●	●	●	●	●	●	●
Heavy-duty brakes: 280mm ventilated front discs w/twin-pot calipers, 295mm rear drums	●	●										
Seating												
Front bucket whiplash protection seats	●	●	●	●	●	●	●	●	●	●	●	●
Height-adjustable driver's seat				●				●	●	●	●	●
Split-fold rear seat (*with centre arm rest)		●	●	●*					●*	●*	●*	●*
Rear twin pull-down jump seats							●	●				
Rear centre seat headrest		●	●	●					●	●	●	●
In-cabin Storage												
Upper and lower glovebox compartments	●	●	●	●	●	●	●	●	●	●	●	●
Power outlet in glovebox	●	●	●	●	●	●	●	●	●	●	●	●
Centre floor console with rear flipout cup holder (*AT models only)			●	●				●*	●*	●	●	●
Dual-purpose driver and front passenger cup holder tray	●	●	●	●	●	●	●	●	●	●	●	●
Rear passenger door cup holders		●	●	●				●	●	●	●	●
Map pockets on backs of front seats				●				●	●	●	●	●
Overhead console with twin map lights & flip-down sunglasses case				●				●			●	●
Front door storage compartment with bottle bulge	●	●	●	●	●	●	●	●	●	●	●	●
Two coat hooks		●	●	●				●	●	●	●	●
Tool storage under rear flip-up seats		●	●	●				●	●	●	●	●



FEATURES AND SPECIFICATIONS

FEATURES	SX	SX	SX	LS-U	EX	SX	SX	LS-U	SX	SX	LS-M	LS-U
	4x2 Single Cab Chassis Low-Ride	4x2 Crew Cab Ute Low-Ride	4x2 Crew Cab Ute High-Ride	4x2 Crew Cab Ute High-Ride	4x4 Single Cab Chassis	4x4 Single Cab Chassis	4x4 Space Cab Chassis	4x4 Space Cab Ute	4x4 Crew Cab Chassis	4x4 Crew Cab Ute	4x4 Crew Cab Ute	4x4 Crew Cab Ute
Rear Tub												
Double-walled ute tub		•	•	•				•		•	•	•
4 cargo tie-down hooks inside ute tub		•	•	•				•		•	•	•
Cab guard frame (unboltable for canopy and tonneau cover fitting)		•	•							•		
Exterior Style												
Short front overhang for optimal manoeuvrability & approach angle	•	•	•	•	•	•	•	•	•	•	•	•
Halogen multi-reflector headlights	•	•	•		•	•	•	•	•	•	•	•
Projector lens headlights for extra low beam depth & reduced flare				•				•			•	•
Front fog lights				•				•			•	•
Chrome radiator grille				•				•			•	•
Gun Metal Grey radiator grille	•	•	•			•	•		•	•		
Black front bumper and radiator grille					•							
Colour-coded front bumper	•	•	•	•		•	•	•	•	•	•	•
Space cab rear "wing" doors							•	•				
Aluminium side steps				•				•				•
Black door handles	•	•	•		•	•	•		•	•	•	
Chrome door and tailgate handles								•				•
Lockable tailgate								•				•
Chrome fold-in power door mirrors with integrated turn indicators				•				•				•
Colour-coded power door mirrors with integrated turn indicators	•	•	•			•	•		•	•	•	
Black door mirrors					•							•
Centre front roof-mounted bee-sting aerial				•				•			•	•
LED rear combination lamps				•				•			•	•
One-step chrome-plated rear bumper				•				•				•
Cabin Amenities												
Air-conditioning with integrated heater/demister	•	•	•	•	•	•	•	•	•	•	•	•
Pollen & fine particle air filter	•	•	•	•	•	•	•	•	•	•	•	•
Power windows with one-touch down driver's window	•	•	•			•	•	•	•	•	•	•
Power windows with one-touch up/down driver's window with safety stop and delay closing				•				•			•	•
Central locking with keyless entry	•	•	•	•		•	•	•	•	•	•	•
Power-adjustable door mirrors	•	•	•	•		•	•	•	•	•	•	•
Cruise control	•	•	•	•		•	•	•	•	•	•	•
"Sky Sound" roof-mounted sound system with 6 speakers (mounted in front dash, front doors and roof)				•				•			•	•
CD/MP3/FM/AM/AUX audio unit with Micro USB, iPod® input and Bluetooth® connectivity				•				•			•	•
CD/MP3/FM/AM/AUX 2 speaker audio unit with USB, iPod® input and Bluetooth® connectivity	•	•	•		•	•	•		•	•		
Tilt-adjustable steering wheel with power steering	•	•	•	•	•	•	•	•	•	•	•	•
Leather steering wheel with cruise and audio controls				•				•			•	•
Multi-Information Display (MID): odometer, trip odometers A & B	•	•	•		•	•	•		•	•		
Multi-Information Display (MID): as above plus fuel economy, range and maintenance distance				•				•			•	•
Electro-luminescent gauges				•				•			•	•
"Terrain Command" 4WD select dial					•	•	•	•	•	•	•	•
Windscreen wipers with intermittent sweep mode	•	•	•		•	•	•	•	•	•	•	•
Windscreen wipers with variable intermittent sweep mode				•				•			•	•
Day/night interior rear view mirror	•	•	•	•	•	•	•	•	•	•	•	•
Sun visors with vanity mirror (left) & ticket retaining strap (right)				•				•			•	•
Fixed A-pillar assist-grips for driver and front passenger			•	•	•	•	•	•	•	•	•	•
Folding assist-grips for driver and front passenger	•	•	•	•	•	•	•	•	•	•	•	•
Folding assist-grips for rear passengers		•	•	•				•	•	•	•	•
Carpet flooring				•				•				•
Easy-clean vinyl flooring	•	•	•		•	•	•		•	•	•	



FEATURES AND SPECIFICATIONS


SPECIFICATIONS	SX	SX	SX	LS-U	EX	SX	SX	LS-U	SX	SX	LS-M	LS-U
	<div style="display: flex; justify-content: space-between; text-align: center;"> 4x2 Single Cab Chassis Low-Ride 4x2 Crew Cab Ute Low-Ride 4x2 Crew Cab Ute High-Ride 4x4 Single Cab Chassis 4x4 Space Cab Chassis 4x4 Space Cab Ute 4x4 Crew Cab Chassis 4x4 Crew Cab Ute </div>											
D-MAX ADR 81/02² Fuel Consumption Values												
Transmission (MT = Manual, AT = Automatic)	MT	MT	AT	MT / AT	MT	MT / AT	MT / AT	MT / AT	MT / AT	MT / AT	MT / AT	MT / AT
FUEL CONSUMPTION (litres/100km)												
Combined	8.0	8.2	8.0	8.3/8.1	8.3	8.3/8.1	8.3/8.1	8.3/8.1	8.3/8.1	8.3/8.1	8.3/8.1	8.3/8.1
Urban	10.3	10.4	9.9	10.6/10.0	10.6	10.6/10.0	10.6/10.0	10.6/10.0	10.6/10.0	10.6/10.0	10.6/10.0	10.6/10.0
Extra Urban	6.8	6.9	6.9	7.0/7.0	7.0	7.0/7.0	7.0/7.0	7.0/7.0	7.0/7.0	7.0/7.0	7.0/7.0	7.0/7.0
CO² (g/km)												
Combined	212	216	211	220/214	220	220/214	220/214	220/214	220/214	220/214	220/214	220/214
Urban	270	274	261	278/264	278	278/264	278/264	278/264	278/264	278/264	278/264	278/264
Extra Urban	179	183	182	186/185	186	186/185	186/185	186/185	186/185	186/185	186/185	186/185
Dimensions (mm unless stated otherwise)												
Wheelbase	3095	3095	3095	3095	3095	3095	3095	3095	3095	3095	3095	3095
Overall length	5040	5190	5190	5295	5040	5040	5020	5295	5020	5190	5190	5295
Overall width (excluding door mirrors)	1775	1775	1860	1860	1860	1860	1860	1860	1860	1860	1860	1860
Overall height (*depends on body fitted)	1685*	1690	1785	1795	1780*	1780*	1780*	1790	1785*	1785	1785	1795
Front overhang	905	905	905	905	905	905	905	905	905	905	905	905
Rear overhang (*depends on body fitted)	1040*	1190	1190	1295	1040*	1040*	1020*	1295	1020*	1190	1190	1295
Front and rear track	1510	1510	1570	1570	1570	1570	1570	1570	1570	1570	1570	1570
Ground clearance	190	190	225	235	225	225	225	235	225	225	225	235
Turning circle diameter between kerbs (metres)	12.0	12.0	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6
Approach angle	20.7°	20.7°	29.4°	30°	29.4°	29.4°	29.4°	30°	29.4°	29.4°	29.4°	30°
Departure angle	20.3°	20.3°	27.4°	22.7°	27.4°	27.4°	27.4°	22.7°	27.4°	27.4°	27.4°	22.7°
Ramp-over angle	17.3°	17.3°	21.7°	22.4°	21.7°	21.7°	21.7°	22.4°	21.7°	21.7°	21.7°	22.4°
Load area (mm)												
Cab to rear axle	1235	430	430	430	1235	1235	740	740	430	430	430	430
Length (top)	-	1485	1485	1485	-	-	-	1795	-	1485	1485	1485
Length (floor) (*inside genuine accessory tray body)	2550*	1552	1552	1552	2550*	2550*	1950*	1825	1650*	1552	1552	1552
Maximum width (*inside genuine accessory tray body)	1777*	1530	1530	1530	1777*	1777*	1777*	1530	1777*	1530	1530	1530
Width between wheel houses	-	1105	1105	1105	-	-	-	1105	-	1105	1105	1105
Depth	-	465	465	465	-	-	-	465	-	465	465	465
Interior (mm)												
Leg room - front	1070	1070	1070	1070	1070	1070	1070	1070	1070	1070	1070	1070
Leg room - rear	-	915	915	915	-	-	740	740	915	915	915	915
Shoulder room - front	1460	1460	1460	1460	1460	1460	1460	1460	1460	1460	1460	1460
Head room - front	1005	1005	1005	1005	1005	1005	1005	1005	1005	1005	1005	1005
Mass (kg)												
Tare mass* (*depends on body fitted) (^ +5kg for automatic)	1527*	1785	1815	1835^	1657*	1660*^	1741*^	1900^	1795*^	1925^	1905^	1935^
Total load capacity (*depends on body fitted) (^ -5kg for automatic)	1323*	1065	1035	1015^	1293*	1290*^	1209*^	1050^	1155*^	1025^	1045^	1015^
Gross Vehicle Mass (GVM)	2850	2850	2850	2850	2950	2950	2950	2950	2950	2950	2950	2950
Gross Combination Mass (GCM)	5350	5350	5350	5350	5950	5950	5950	5950	5950	5950	5950	5950
Maximum towing mass (braked trailer)	2500	2500	2500	2500	3500	3500	3500	3500	3500	3500	3500	3500
Maximum towing mass (non-braked trailer)	750	750	750	750	750	750	750	750	750	750	750	750
Maximum tow ball download (when fitted with genuine Isuzu UTE tow kit)	250	250	250	250	350	350	350	350	350	350	350	350
Fuel tank capacity (litres)	76	76	76	76	76	76	76	76	76	76	76	76

²ADR 81/02 is the Australian government's standard lab-based test. Your fuel figures depend on driving style, conditions of usage, vehicle condition and load, and other factors.


iPod® is a trademark of Apple Inc. The Bluetooth® word mark is owned by Bluetooth SIG, Inc. Not all devices will be compatible and functionality will vary depending on the device.

*Tare Mass - unladen mass of vehicle and 10 litres of fuel; excludes tray body for cab chassis vehicles.


4x4 LS-U Crew Cab Ute & 4x2 LS-U Crew Cab Ute High-Ride

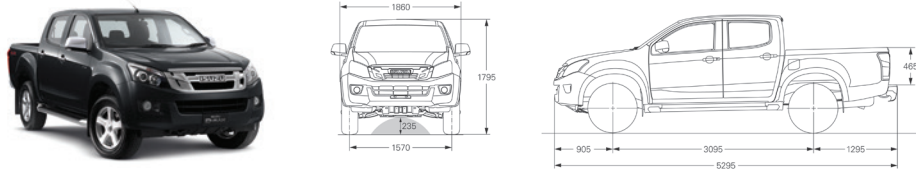


4x4 LS-U Space Cab Ute

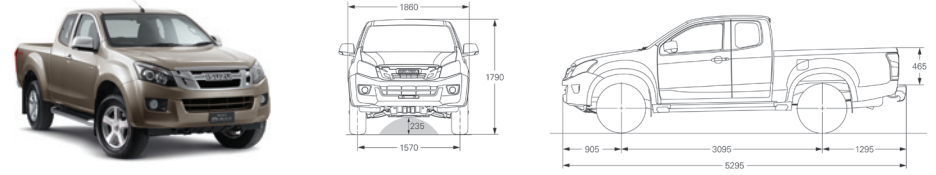


4x4 LS-M Crew Cab Ute

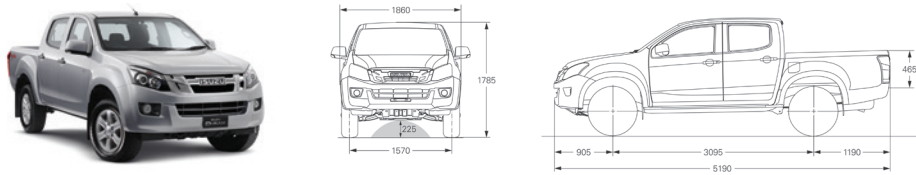


4x4 SX Space Cab Chassis

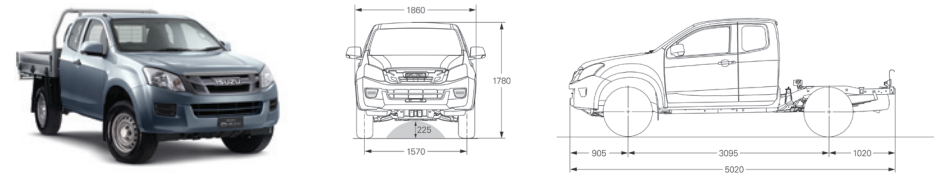


4x4 SX Crew Cab Ute & 4x2 SX Crew Cab Ute High-Ride

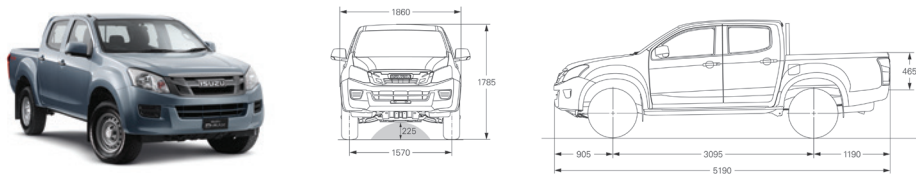


4x4 SX Single Cab Chassis

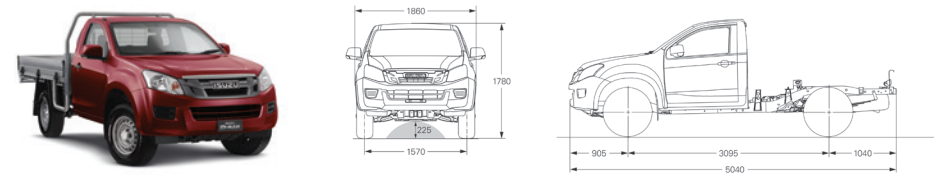


4x4 SX Crew Cab Chassis

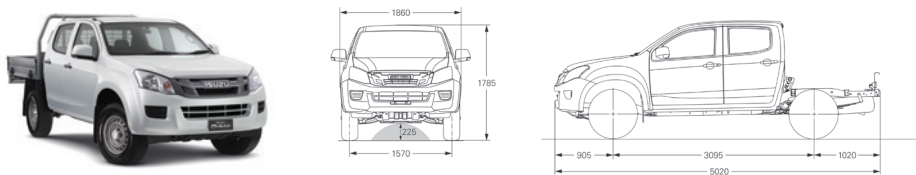


4x4 EX Single Cab Chassis

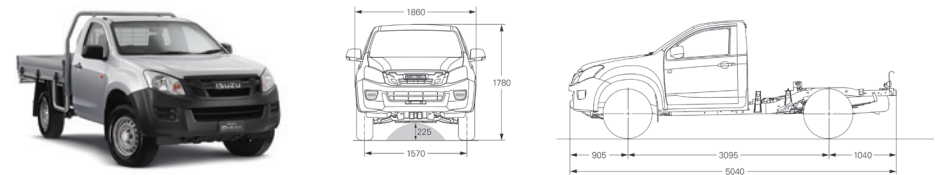

4x2 SX Crew Cab Ute Low-Ride

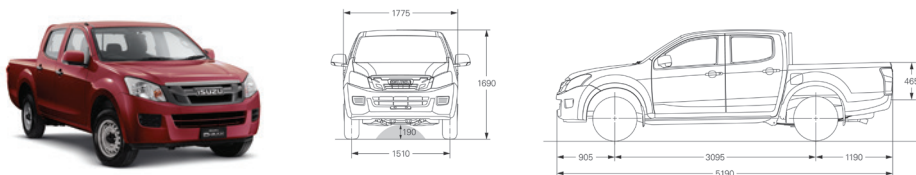

4x2 SX Single Cab Chassis

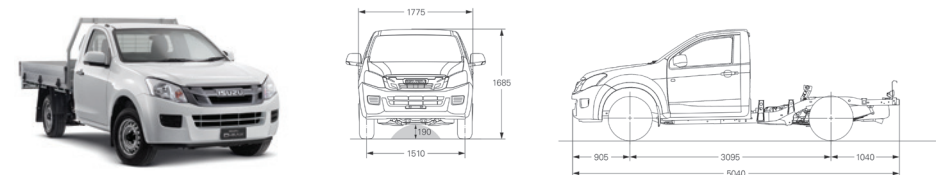

Colour Options



Ash Beige metallic



Cosmic Black mica



Garnet Red mica



Mineral Grey metallic



Nautilus Blue mica



Splash White



Titanium Silver metallic



Tundra Green mica